




Floor Talker


- Floor annunciation
- Gong simulation
- Multi-language support
- Many ways of connection
- High voice quality
- Easy setting

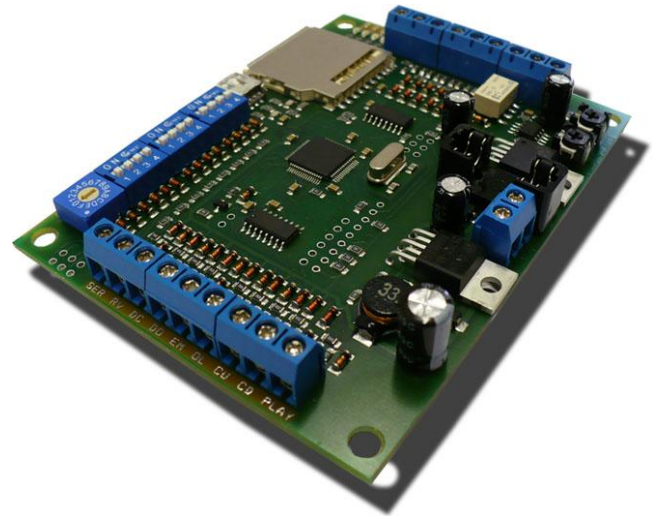

Benefits

- Multi-language support (announcing messages in several languages)
- SD-Card with all messages, firmware and settings included (up to 2GB)
- Possibility to change firmware, messages or settings by using:
 - SD-Card reader
 - PC with USB (without driver - mass storage)
 - Optionally Ethernet connection
- Possibility to record your own messages
- PC program with all functions for SD-Card record, USB and ethernet connection with Floor Talker
- Many types of announcements such as:
 - "door is closing"
 - "next direction of movement ...up"
 - "cabin overloaded"
 - "lift is in fire service"
- 4 LED indication for easy install
- 4 DIP switch for easy install
- Gong simulation
- Floor annunciation
- Easy setting
- High quality of voice

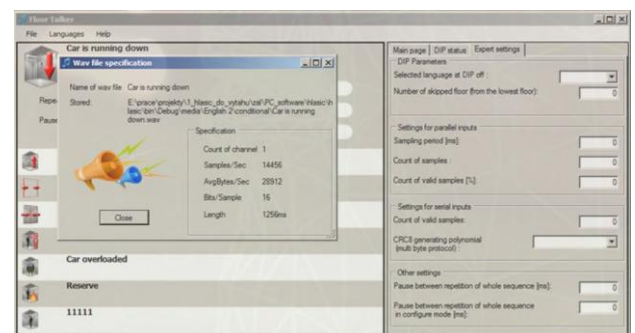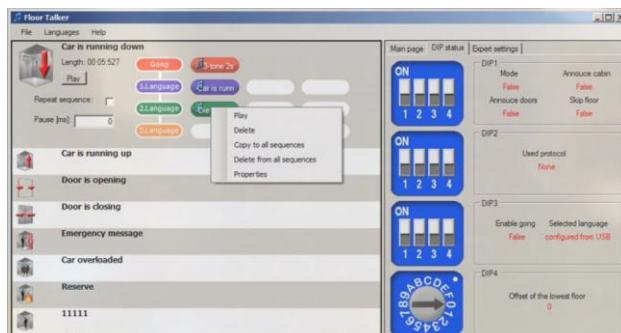

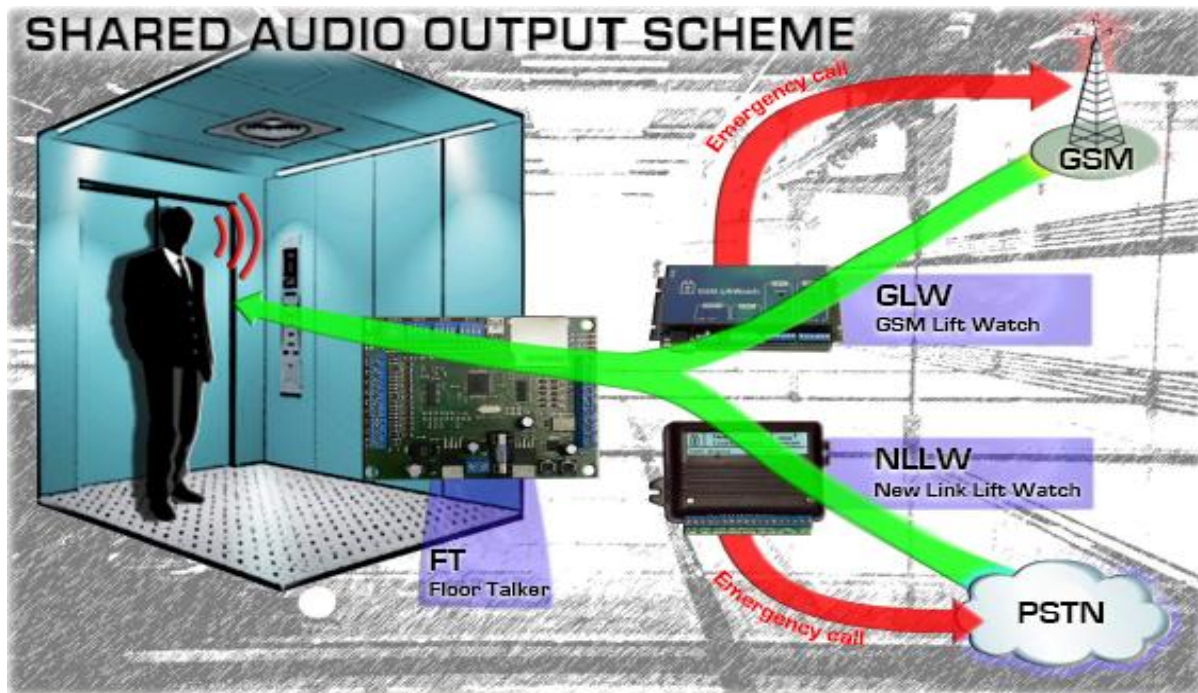

Technical parameters

Power supply voltage	9V - 30 V DC (12V to 24V DC interface for PCV DC recommended)
Current consumption	max. 200mA with 8Ω loudspeaker
Fuse	T 1A
Voice adjustment	Volume - min. logarithmic law Treble - flat characteristics in the middle position
Memory	SD card interface (up to 2GB)
Audio format	digital, WAV, 16 bit, 14500Hz
USB interface for PC	USB 1.0, USB 2.0
Operating position	Vertical, DIP switches, SD and USB connector upstairs
Loudspeaker	Minimum impedance 8Ω, minimum power 0,5W
Dimensions	82x108x25mm
Logic levels	"0" = 0V to 2V "1" = 6V to 30V
"Pull up" resistors	22kΩ to the positive power supply
Max. input voltage	+ / - 40V respective to positive power supply

